


T-6242

10 Channel Speaker Supervisor, impedance, open/short circuit detection, AC 230V and DC 24V



Features

- * Rack mounted design in 2U height.
- * LCD English display and 1-10 channel status indicator.
- * Detection over speaker line impedance, open circuit, short circuit and overloading.
- * Timely detect speaker loop line.
- * Speaker line detection no interrupt with music broadcasting or paging.
- * Indications include indicator color change and buzzer alarm when speaker line impedance has been changed.
- * Each channel detection Max. 2000W speaker loading.
- * LCD real time display speaker line's status and power.
- * Suitable for 100V and 70V line speaker system.
- * Ten channel inputs and outputs.
- * AC110V or 230V and DC 24V DC operation.
- * Pre-setting memory function even in case of power off.

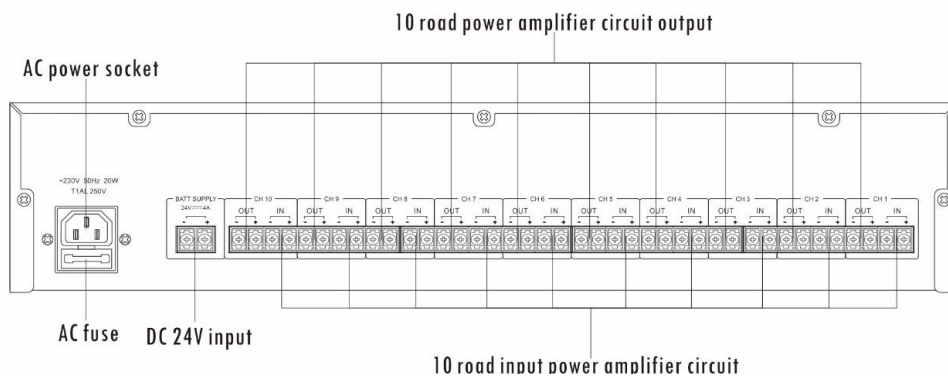

Product Model	T-6242
Power Supply	~110V-230V 50/60Hz & DC 24V
Power Consumption	20W
Dimension	484 x 303 x 88mm
Weight	5.36Kg